

## SF08-22 - High Pressure

### 2 Way, Normally Closed, 345 BAR Rated

A solenoid-operated, 2-way, normally closed, piloted poppet-type, screw-in hydraulic cartridge valve, intended to act as a blocking or load-holding device for low flow circuits.



Voltage	Hydraforce code	Article no.	Price £	Price €
<b>CARTRIDGE VERSION</b>				
24V DC	SF08-22-0-P-24DG	<b>SF0822C24</b>	<b>£111.50</b>	<b>€133.80</b>
110V AC	SF08-22-0-P-115AG	<b>SF0822C115</b>	<b>£131.60</b>	<b>€158.00</b>
220V AC	SF08-22-0-P-230AG	<b>SF0822C230</b>	<b>£138.10</b>	<b>€165.70</b>
<b>INLINE WITH DUCTILE IRON BODY 3/8" BSP</b>				
24V DC	SF08-22-3BD-P-24DG	<b>SF08223B24</b>	<b>£176.90</b>	<b>€212.30</b>
110V AC	SF08-22-3BD-P-115AG	<b>SF08223B115</b>	<b>£197.10</b>	<b>€236.50</b>
220V AC	SF08-22-3BD-P-230AG	<b>SF08223B230</b>	<b>£203.50</b>	<b>€244.20</b>
<b>with polyurethane seals</b>				
<b>WITH 'G' DIN CONNECTOR PLUG</b>				

On request - Viton Seals - Screen filter protection - Manual Override  
On request - For DC coils with spade or push on connections

### Materials

#### Cartridge:

Weight: 0.09 kg. (0.20 lbs.)  
Steel with hardened work surfaces.  
Zinc-plated exposed surfaces.  
Polyurethane cast O-rings and  
Fluorocarbon back-up standard.


#### Ported Body:

Weight: 0.54 kg. (1.2 lbs.)  
Ductile iron standard;  
rated to 345 bar (5000 psi).

#### Standard Coil:


Weight: 0.11 kg. (0.25 lbs.)  
Unitized thermoplastic encapsulated.

### Dimensions

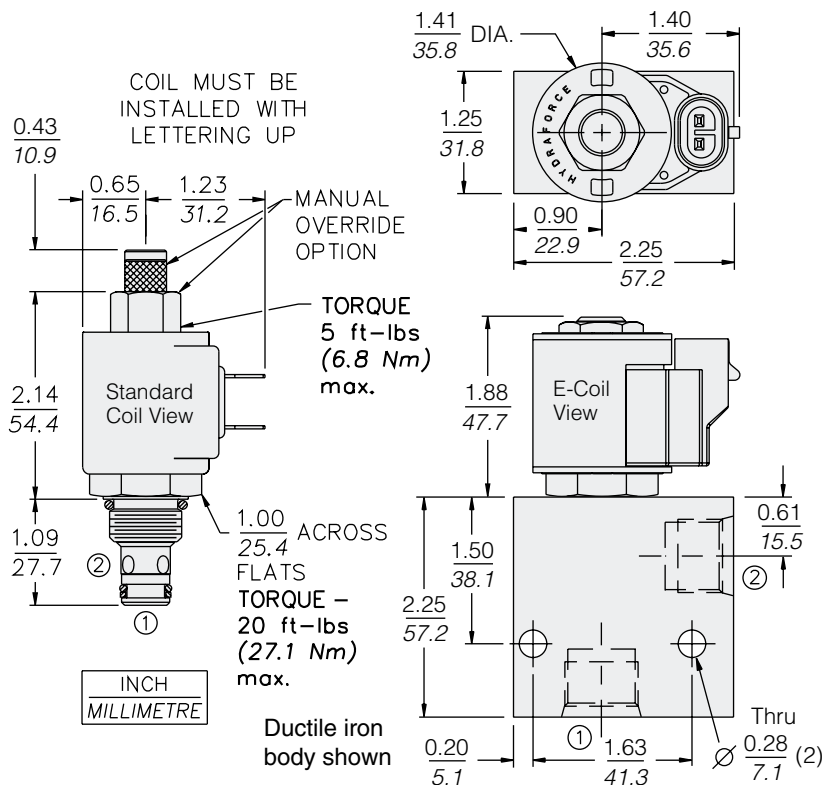


### Symbols

#### USASI:



#### ISO:



### Performance (Cartridge Only)

