

## SV08-21

### 2 Way, Normally Open, 207 BAR Rated

A solenoid-operated, 2-way, piloted, poppet-type, normally open, screw-in, hydraulic cartridge valve designed for low leakage in load-holding applications.

Voltage	Hydraforce code	Article no.	Price £	Price €
<b>CARTRIDGE VERSION</b>				
24V DC	SV08-21-0-N-24DG	<b>SV0821C24</b>	<b>£103.00</b>	<b>€123.60</b>
110V AC	SV08-21-0-N-115AG	<b>SV0821C115</b>	<b>£123.20</b>	<b>€147.80</b>
220V AC	SV08-21-0-N-230AG	<b>SV0821C230</b>	<b>£129.60</b>	<b>€155.60</b>
<b>INLINE WITH BODY 1/4" BSP</b>				
24V DC	SV08-21-2B-N-24DG	<b>SV08212B24</b>	<b>£139.30</b>	<b>€167.20</b>
110V AC	SV08-21-2B-N-115AG	<b>SV08212B110</b>	<b>£159.50</b>	<b>€191.40</b>
220V AC	SV08-21-2B-N-230AG	<b>SV08212B230</b>	<b>£166.00</b>	<b>€199.20</b>
<b>INLINE WITH BODY 3/8" BSP</b>				
24V DC	SV08-21-3B-N-24DG	<b>SV08213B24</b>	<b>£139.30</b>	<b>€167.20</b>
110V AC	SV08-21-3B-N-115AG	<b>SV08213B115</b>	<b>£159.50</b>	<b>€191.40</b>
220V AC	SV08-21-3B-N-230AG	<b>SV08213B230</b>	<b>£166.00</b>	<b>€199.20</b>
<b>with nitril seals</b>				
<b>WITH 'G' DIN CONNECTOR PLUG</b>				

On request - Viton Seals - Screen filter protection - Manual Override  
On request - For DC coils with spade or push on connections



HYDRAFORCE

### Materials

#### Cartridge:

Weight: 0.09 kg. (0.20 lbs.)  
Steel with hardened work surfaces.  
Zinc-plated exposed surfaces.  
Buna N O-rings and back-up standard.


#### Standard Ported Body:

Weight: 0.16 kg. (0.35 lbs.)  
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).  
Ductile iron bodies available; dimensions may differ.

#### Standard Coil:


Weight: 0.11 kg. (0.25 lbs.)  
Unitized thermoplastic encapsulated

### Dimensions

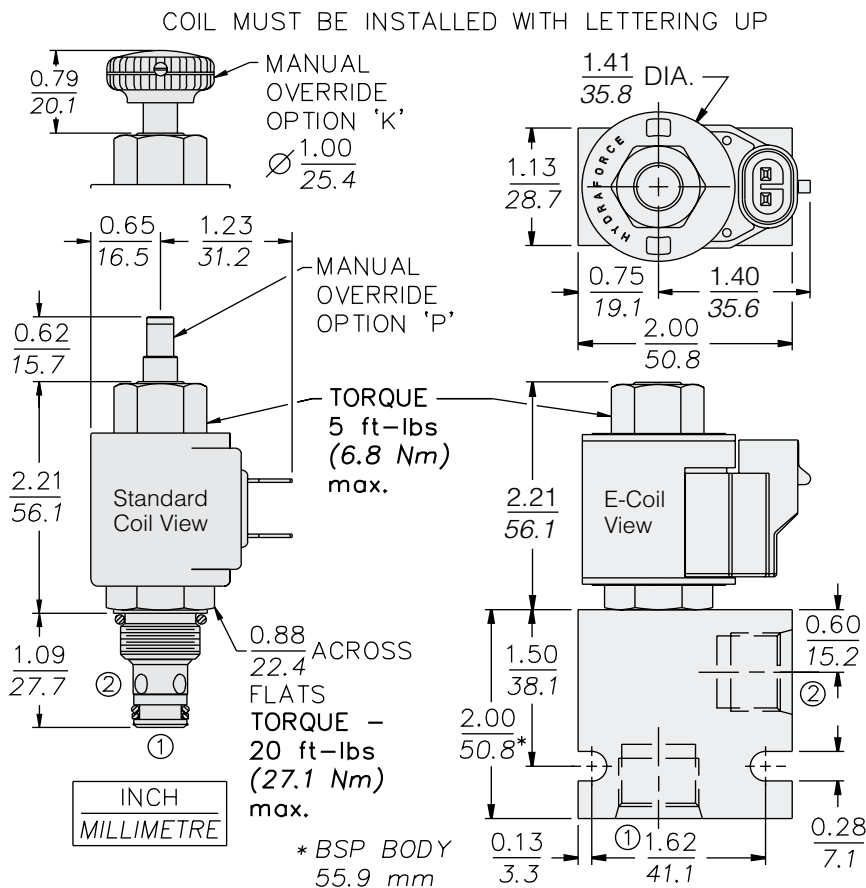


### Symbols

#### USASI:



#### ISO:



### Performance (Cartridge Only)

