

## SV08-40



### 4 Way, 2 Position, Spool, 207 BAR Rated

A solenoid-operated, 4-way, 2-position, direct-acting spool-type, screw-in hydraulic cartridge valve.

| Voltage                            | Hydraforce code    | Article no.        | Price £        | Price €        |
|------------------------------------|--------------------|--------------------|----------------|----------------|
| <b>CARTRIDGE VERSION</b>           |                    |                    |                |                |
| 24V DC                             | SV08-40-0-N-24DG   | <b>SV0840C24</b>   | <b>£103.80</b> | <b>€124.50</b> |
| 110V AC                            | SV08-40-0-N-115AG  | <b>SV0840C115</b>  | <b>£124.00</b> | <b>€148.80</b> |
| 220V AC                            | SV08-40-0-N-230AG  | <b>SV0840C230</b>  | <b>£130.50</b> | <b>€156.50</b> |
| <b>INLINE WITH BODY 1/4" BSP</b>   |                    |                    |                |                |
| 24V DC                             | SV08-40-2B-N-24DG  | <b>SV08402B24</b>  | <b>£156.30</b> | <b>€187.50</b> |
| 110V AC                            | SV08-40-2B-N-115AG | <b>SV08402B110</b> | <b>£176.50</b> | <b>€211.80</b> |
| 220V AC                            | SV08-40-2B-N-230AG | <b>SV08402B230</b> | <b>£183.00</b> | <b>€219.50</b> |
| <b>INLINE WITH BODY 3/8" BSP</b>   |                    |                    |                |                |
| 24V DC                             | SV08-40-3B-N-24DG  | <b>SV08403B24</b>  | <b>£156.30</b> | <b>€187.50</b> |
| 110V AC                            | SV08-40-3B-N-115AG | <b>SV08403B110</b> | <b>£176.50</b> | <b>€211.80</b> |
| 220V AC                            | SV08-40-3B-N-230AG | <b>SV08403B230</b> | <b>£183.00</b> | <b>€219.50</b> |
| <b>with nitril seals</b>           |                    |                    |                |                |
| <b>WITH 'G' DIN CONNECTOR PLUG</b> |                    |                    |                |                |

On request - Viton Seals - Screen filter protection - Manual Override  
On request - For DC coils with spade or push on connections

### Dimensions

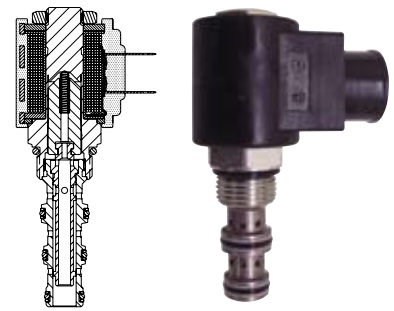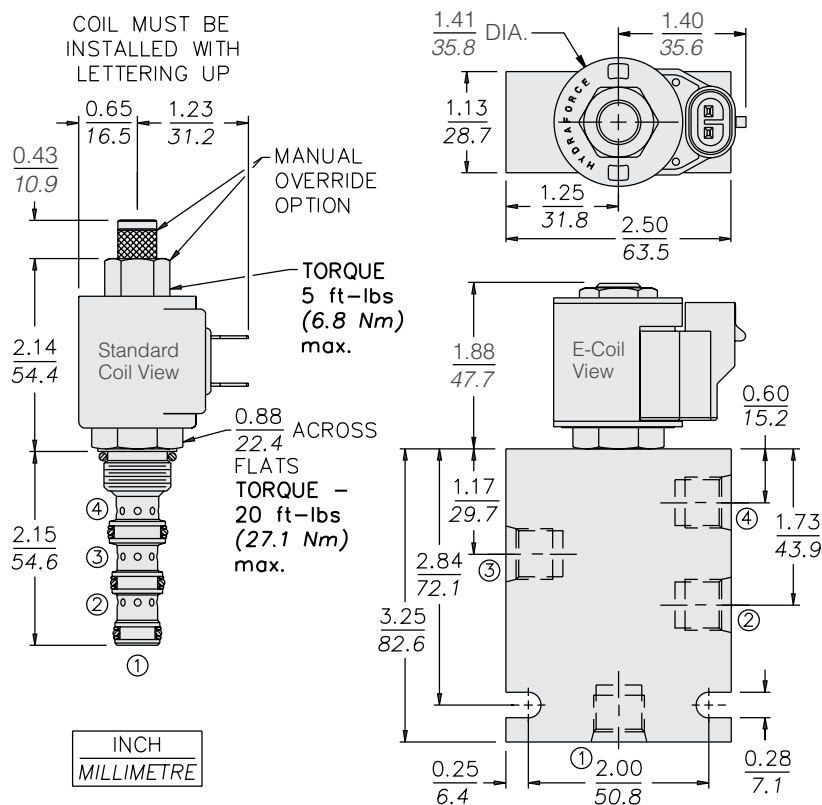

HYDRAFORCE

### Materials

#### Cartridge:

Weight: 0.13 kg. (0.28 lbs.)  
Steel with hardened work surfaces.  
Zinc-plated exposed surfaces.  
Buna N O-rings and back-ups standard.

#### Standard Ported Body:


Weight: 0.27 kg. (0.60 lbs.)  
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).  
Ductile iron bodies available; dimensions may differ.

#### Standard Coil:


Weight: 0.11 kg. (0.25 lbs.)  
Unitized thermoplastic encapsulated.

### Symbols

#### USASI/ISO:



#### TRANSITION:



### Performance (Cartridge Only)

