

## SV10-29


### 2 Way, Normally Open, 207 BAR Rated

A solenoid-operated, 2-way, normally open, internally piloted, poppet-type, bi-directional blocking, screw-in hydraulic cartridge valve, designed for low leakage in load-holding applications.

Voltage	Hydraforce code	Article no.	Price £	Price €
<b>CARTRIDGE VERSION</b>				
24V DC	SV10-29-0-N-24DG	<b>SV1029C24</b>	<b>£165.20</b>	<b>€198.20</b>
110V AC	SV10-29-0-N-115AG	<b>SV1029C115</b>	<b>£185.00</b>	<b>€222.00</b>
220V AC	SV10-29-0-N-230AG	<b>SV1029C230</b>	<b>£185.00</b>	<b>€222.00</b>
<b>INLINE WITH BODY 1/4" BSP</b>				
24V DC	SV10-29-2B-N-24DG	<b>SV10292B24</b>	<b>£203.90</b>	<b>€244.70</b>
110V AC	SV10-29-2B-N-115AG	<b>SV10292B110</b>	<b>£223.70</b>	<b>€268.50</b>
220V AC	SV10-29-2B-N-230AG	<b>SV10292B230</b>	<b>£223.70</b>	<b>€268.50</b>
<b>INLINE WITH BODY 3/8" BSP</b>				
24V DC	SV10-29-3B-N-24DG	<b>SV10293B24</b>	<b>£203.10</b>	<b>€243.80</b>
110V AC	SV10-29-3B-N-115AG	<b>SV10293B115</b>	<b>£222.90</b>	<b>€267.50</b>
220V AC	SV10-29-3B-N-230AG	<b>SV10293B230</b>	<b>£222.90</b>	<b>€267.50</b>
<b>INLINE WITH BODY 1/2" BSP</b>				
24V DC	SV10-29-4B-N-24DG	<b>SV10294B24</b>	<b>£203.10</b>	<b>€243.80</b>
110V AC	SV10-29-4B-N-115AG	<b>SV10294B115</b>	<b>£222.90</b>	<b>€267.50</b>
220V AC	SV10-29-4B-N-230AG	<b>SV10294B230</b>	<b>£222.90</b>	<b>€267.50</b>
<b>with nitril seals</b>				
<b>WITH 'G' DIN CONNECTOR PLUG</b>				

On request - Viton Seals - Screen filter protection - Manual Override  
On request - For DC coils with spade or push on connections

### Dimensions

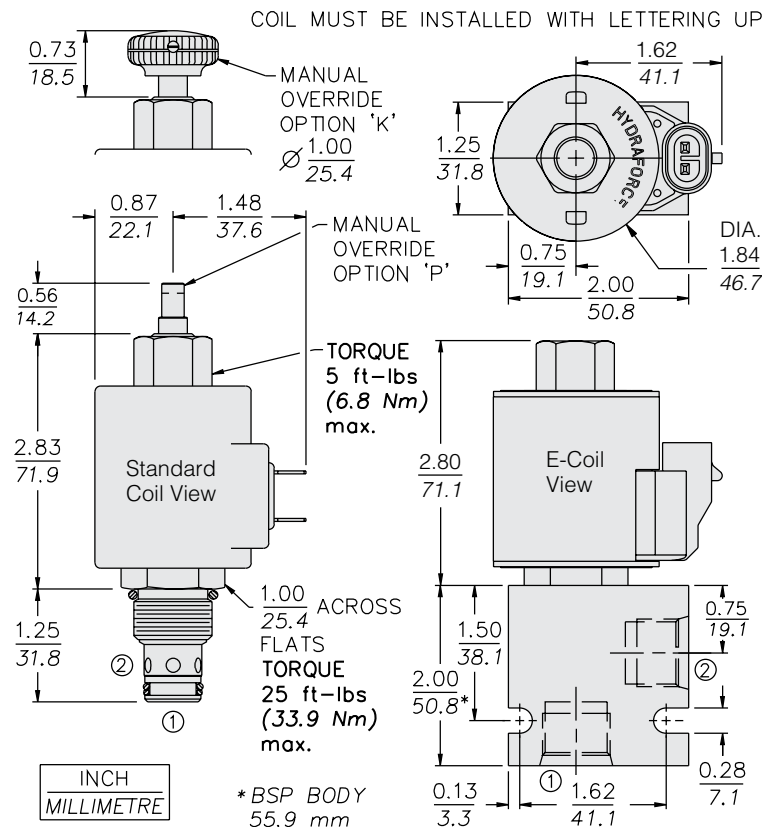

HYDRAFORCE

### Materials

#### Cartridge:

Weight: 0.16 kg. (0.35 lbs.)  
Steel with hardened work surfaces.  
Zinc-plated exposed surfaces.  
Buna N O-rings and polyester elastomer back-up standard.

#### Standard Ported Body:


Weight: 0.16 kg. (0.35 lbs.)  
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).  
Ductile iron bodies available; dimensions may differ.

#### Standard Coil:


Weight: 0.27 kg. (0.60 lbs.)  
Unitized thermoplastic encapsulated,

### Symbols

#### USASI/ISO:



#### ISO:



### Performance (Cartridge Only)

