

SV10-41

4 Way, 2 Position, Spool, 207 BAR Rated

A solenoid-operated, 4-way, 2-position, direct-acting, spool-type, screw-in hydraulic cartridge valve.

Materials

Cartridge:

Weight: 0.20 kg. (0.45 lbs.)
Steel with hardened work surfaces.
Zinc-plated exposed surfaces.
Buna N O-rings and polyester elastomer back-up standard.

Standard Ported Body:

Weight: 0.36 kg. (0.80 lbs.)
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).
Ductile iron bodies available; dimensions may differ.

Standard Coil:


Weight: 0.27 kg. (0.60 lbs.)
Unitized thermoplastic encapsulated.

Voltage	Hydraforce code	Article no.	Price £	Price €
CARTRIDGE VERSION				
24V DC	SV10-41-0-N-24DG	SV1041C24	£117.50	€141.00
110V AC	SV10-41-0-N-115AG	SV1041C115	£137.30	€164.80
220V AC	SV10-41-0-N-230AG	SV1041C230	£137.30	€164.80
INLINE WITH BODY 1/4" BSP				
24V DC	SV10-41-2B-N-24DG	SV10412B24	£179.70	€215.70
110V AC	SV10-41-2B-N-115AG	SV10412B110	£199.50	€239.40
220V AC	SV10-41-2B-N-230AG	SV10412B230	£199.50	€239.40
INLINE WITH BODY 3/8" BSP				
24V DC	SV10-41-3B-N-24DG	SV10413B24	£174.90	€209.80
110V AC	SV10-41-3B-N-115AG	SV10413B110	£194.60	€233.60
220V AC	SV10-41-3B-N-230AG	SV10413B230	£194.60	€233.60
with nitril seals				
WITH 'G' DIN CONNECTOR PLUG				


On request - Viton Seals - Screen filter protection - Manual Override
On request - For DC coils with spade or push on connections

Symbols

USASI/ISO:



Performance (Cartridge Only)

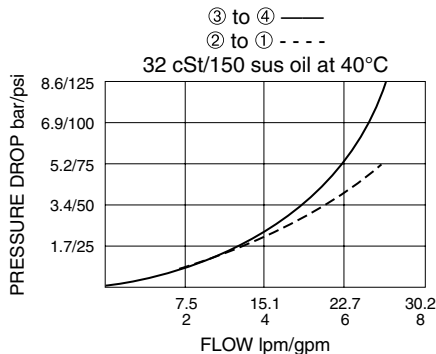

Dimensions

