



SV10-47D

4 Way, 3 Position, Motor Spool, Closed Center, 207 BAR Rated

A solenoid-operated, 4-way, 3-position, direct-acting, spool-type, motor spool, screw-in hydraulic cartridge valve.

Materials

Cartridge:

Weight: 0.30 kg. (0.65 lbs.)
Steel with hardened work surfaces.
Zinc-plated exposed surfaces.
Buna N O-rings and back-ups standard.

Standard Ported Body:

Weight: 0.36 kg. (0.80 lbs.)
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).
Ductile iron bodies available; dimensions may differ.

Standard Coil:


Weight each: 0.27 kg. (0.60 lbs.)
Unitized thermoplastic encapsulated.

Voltage	Hydraforce code	Article no.	Price £	Price €
CARTRIDGE VERSION				
24V DC	SV10-47D-0-N-24DG	SV1047DC24	£208.00	€249.60
110V AC	SV10-47D-0-N-115AG	SV1047DC115	£247.50	€297.10
220V AC	SV10-47D-0-N-230AG	SV1047DC230	£247.50	€297.10
INLINE WITH BODY 1/4" BSP				
24V DC	SV10-47D-2B-N-24DG	SV1047D2B24	£270.20	€324.20
110V AC	SV10-47D-2B-N-115AG	SV1047D2B110	£309.80	€371.70
220V AC	SV10-47D-2B-N-230AG	SV1047D2B230	£309.80	€371.70
INLINE WITH BODY 3/8" BSP				
24V DC	SV10-47D-3B-N-24DG	SV1047D3B24	£265.30	€318.40
110V AC	SV10-47D-3B-N-115AG	SV1047D3B110	£304.90	€365.90
220V AC	SV10-47D-3B-N-230AG	SV1047D3B230	£304.90	€365.90
with nitril seals				
WITH 'G' DIN CONNECTOR PLUG				


On request - Viton Seals - Screen filter protection - Manual Override
On request - For DC coils with spade or push on connections

Symbols


USASI:



ISO:



Performance (Cartridge Only)

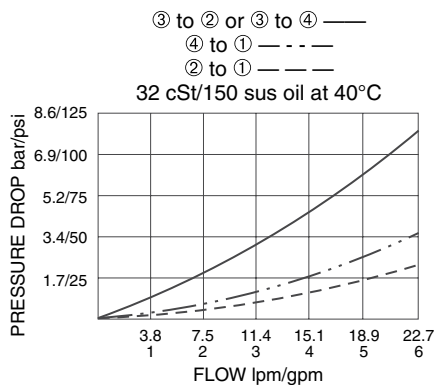

Dimensions

